


HHC71B(JQX-38F) 大功率电磁继电器

型号说明

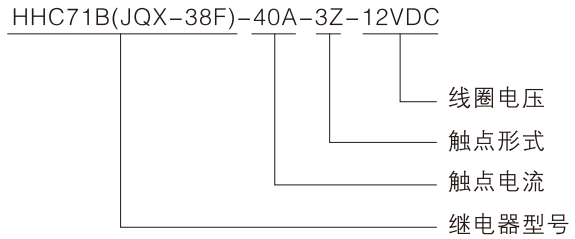




产品特点

◇使用寿命长；◇通用型强；◇触点负载大；◇使用方便；



技术参数

触点	形式	2Z,2H,2D	3Z,3H,3D
	负载(阻性)	40A/240VAC 28VDC	
	接触电阻(初始)	≤100mΩ	
	材料	银合金	
	电气寿命(频率1S通,1S断)	≥10 ⁵ 次	
	机械寿命(频率300次/1分钟)	≥10 ⁷ 次	
吸合电压(23°C)		DC: ≤75% × 额定电压, AC: ≤80% × 额定电压	
释放电压(23°C)		DC: ≥10% × 额定电压, AC: ≥30% × 额定电压	
最大电压(23°C)		110% × 额定电压	
线圈规格	直流(DC)	6V,9V,12V,24V,36V,48V,110V,220V(电压可订制)	
	交流(AC)	6V,9V,12V,24V,36V,48V,110V,220V,380V(电压可订制)	
线圈功率	直流(DC)	2.5W	
	交流(AC)	6VA	
吸合时间		≤25ms	
释放时间		≤15ms	
初始耐压	同极触点之间	1500VAC/1min(漏电流 1mA)	
	异极触点之间	1500VAC/1min(漏电流 1mA)	
	触点与线圈间	2500VAC/1min(漏电流 1mA)	
绝缘电阻		≥500MΩ(500VDC)	
环境温度		-25~+55°C	
环境湿度		45%~75%RH	
大气压力		86~106KPa	
耐冲压		10G(正弦半波脉冲:11ms)	
耐振动		10~55Hz 双振幅:1.0mm	
安装方式		插入式,螺丝安装式	
包装信息	内盒数量	10只/泡沫盒	
	外箱数量	泡沫盒:100只/箱	
	外箱尺寸	402mm × 288mm × 370mm	
	重量	大约130g/只,毛重14KG/箱,净重13KG/箱	




外形图、接线图、安装尺寸(mm)

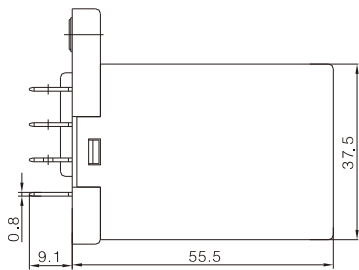



小基座尺寸图

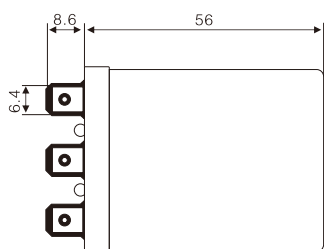

底部(A)型法兰式尺寸图

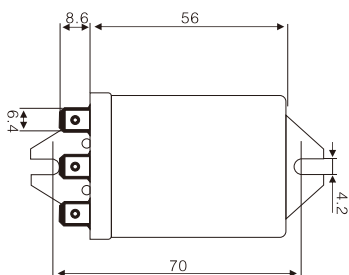

顶部(B)型法兰式尺寸图

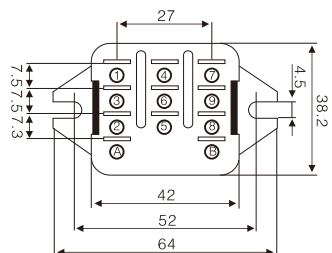

性能曲线图

